

10/53072
JC13 Rec 6 PCT/PTO 07 APR 2005

FAY, SHARPE, FAGAN, MINNICH & MCKEE, LLP

PATENT TRADEMARK AND COPYRIGHT LAW

1100 SUPERIOR AVENUE

SEVENTH FLOOR

MARK E. BANDY
JOSEPH D. DREHER
CHRISTOPHER B. FAGAN
JUDE A. FRY
STEVEN M. HAAS
MICHAEL E. HUZINSKI
RICHARD M. KLEIN
THOMAS E. KOCOVSKY, JR.
SANDRA M. KOENIG
SCOTT A. MCCOLLISTER
JAMES W. MCKEE
JAY F. MOLDOVANYI

PHILIP J. MOY, JR.
TIMOTHY E. NAUMAN
PATRICK R. ROCHE
MARK S. SVAT
BRIAN E. TURUNG
ROBERT V. VICKERS

OF COUNSEL
E. KENT DANIELS, JR.
RICHARD J. MINNICH
THOMAS E. YOUNG

CLEVELAND, OHIO 44114-2579
—
TELEPHONE (216) 861-5582
FAX (216) 241-1666
E-MAIL: fs@faysharpe.com

ALAN C. BRANDT
JOHN P. CORNELY
MATTHEW P. DUGAN
PATRICK D. FLOYD
COLLEEN FLYNN GOSS
KARL W. HAUBER
ERIK J. OVERBERGER
SUE ELLEN PHILLIPS
JAMES E. SCARBROUGH
ROBERT A. SIDOTI
ANN M. SKERRY, PH.D.
SCOTT M. SLABY

GREGORY S. VICKERS
JOSEPH E. WATERS
JONATHAN A. WITHROW
JOHN S. ZANGHI

REGISTERED PATENT AGENTS
ROBERT M. SIEG, PH.D.
THOMAS TILLANDER
GUOSHENG WANG, PH.D.
JEFFREY N. ZAHN
MARINA V. ZALEVSKY

ALBERT P. SHARPE, III
1959-2001

April 13, 2004

VIA FACSIMILE
011 (41-22) 740 14 35

International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland

Re: Amendment under Article 19 in PCT Application of Omnova
Solutions, Inc.
For: **DISPENSE AND CONTROL APPARATUS AND
METHOD FOR COATING AN INJECTION MOLDED
ARTICLE**
Appl. No. PCT/US03/33186; Filed 17 October 2003
Our Reference No.: OMNZ 2 00011 PCT

Dear Sir or Madam:

In accordance with PCT Rule 46, Applicant submits herewith 2 replacement sheets, pages 16 and 16a, to replace originally submitted page 16, in connection with the above-identified matter. No new matter has been added by these amendments. The replacement sheets are provided in triplicate form.

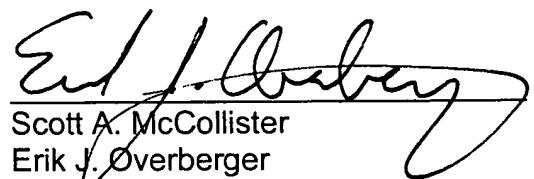
New claims bearing numbers 11-14 have been added.

Respectfully submitted,

Fay, Sharpe, Fagan,
Minnich & McKee, LLP

April 13, 2009

Date


Scott A. McCollister
Erik J. Overberger
216-861-5582 (tel)
216-241-1666(fax)

Agents for Applicant Omova
Solutions, Inc.

Enclosures (x3)

N:\OMNZ\200011\PCT\LAB0002331\V001.doc

REPLACEMENT SHEET

-16-

10. An apparatus for injection molding and in-mold coating an article, said apparatus comprising:

at least two mold members (12,14) defining a mold cavity (16);

means (30) for injecting a molten resin into a mold cavity (16) to form a molded article therein;

means (32) for injecting a coating composition into the mold cavity (16) and onto the molded article; and

means for determining when at least a surface to be coated of the molded article has reached a modulus sufficient to support said coating composition.

11. The method of any one of claims 1-9 further comprising the step of recording data about said in-mold coated article including at least one of (i) the elapsed time from said step of injecting the molten resin into the molding cavity (16) until said coating composition is injected into the molding cavity (16), (ii) the pressure of the molding cavity (16) when said coating composition is initially injected into the molding cavity (16), and (iii) the temperature in the molding cavity (16) when said coating composition is initially injected into the molding cavity (16).

12. The method of claim 11 further comprising the step of transferring said recorded data to a remote location.

13. The method of any one of claims 1-9 and 11-12 further comprising the steps of:

using a package code reader for obtaining information on the in-mold coating composition from a container holding the in-mold coating composition; and

recording said obtained information on the in-mold coating composition.

REPLACEMENT SHEET

-16a-

14. The method of any one of claims 1-9 and 11-13 further comprising the steps of:

providing a user interface wherein a user is presented with a plurality of part icons corresponding to a plurality of in-mold coated articles; and

selecting a specific part icon from said plurality of part icons that corresponds to a specific one of said plurality of in-mold coated articles; and

presetting at least one in-mold coating parameter based on said selected part icons.